

DIETER BARCHMANN · INDUSTRIEVERTRETUNGEN GmbH

Asept-Sterile-Container - Sterile Cans - Sterile Technique


D-61231 Bad Nauheim · Lindenweg 4

Telefon +49(0)6032 96110 · Fax +49(0)6032 961131

barchmanngbh@t-online.de · www.barchmanngbh.de

Asept-Sterile SS Containers-316L (1.4404)

Also with magnetic stirrer, heating jacket, outlet at bottom, other material, from 0.1 L to 200 L

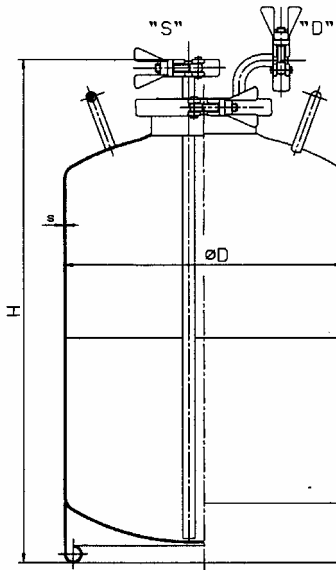

- Robust pressure vessel for aseptic applications
- Surface with minimal roughness, crevice-free welded and completely electropolished
- Material: stainless steel grade AISI 316 L (1.4404)
- Central flange DN 100 as tri-clamp from JC 01 on with:
 - „S“ dispensing nozzle with dip-tube, clamp 1“
 - „D“ pressure nozzle, clamp 1“
- Two handles
- Gaskets made of EPDM (Viton, Silicone, PTFE)

Specials:

Other materials and surfaces, sight glasses, different connections, outlet at bottom

Accessories:

Magnetic stirrer, agitator, trolley, heating jacket,

Type	volume (l)	D (mm)	H (mm)	s (mm)	Adm. Working pressure (bar)	mass (kg)	handle
JC 0,1	0,11	45	135	1,0	-1/5	0,2	no
JC 0,25	0,3	67	135	1,0	-1/5	0,3	no
JC 0,5	0,6	89	170	1,0	-1/5	0,5	no
JC 01	1,4	108	250	1,0	-1/5	3	no
JC 02	3	140	325	1,0	-1/5	3	no
JC 05	6	181	380	1,0	-1/5	3,5	no
NC 10	12	229	430	1,5	-1/5	6	yes
NC 20	22	278	490	1,5	-1/5	8	yes
NC 30	33	324	550	1,5	-1/5	13	yes
NC 50	54	363	620	1,5	-1/3	16	yes
HC 100	110	450	900	2,0	-1/3	32	yes
HC 200	220	600	1000	2,0	-1/3	45	yes